

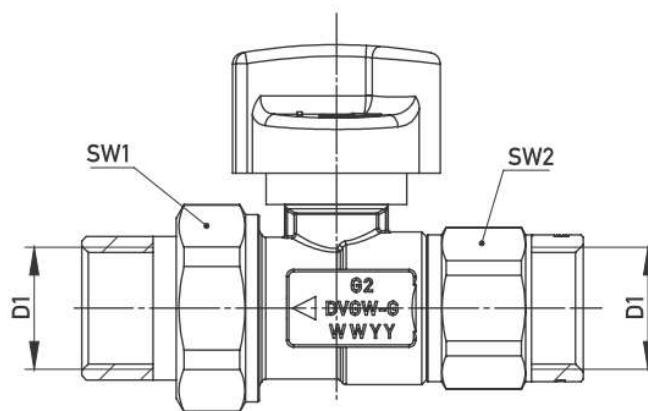


TRINNITY Gasgerätehahn

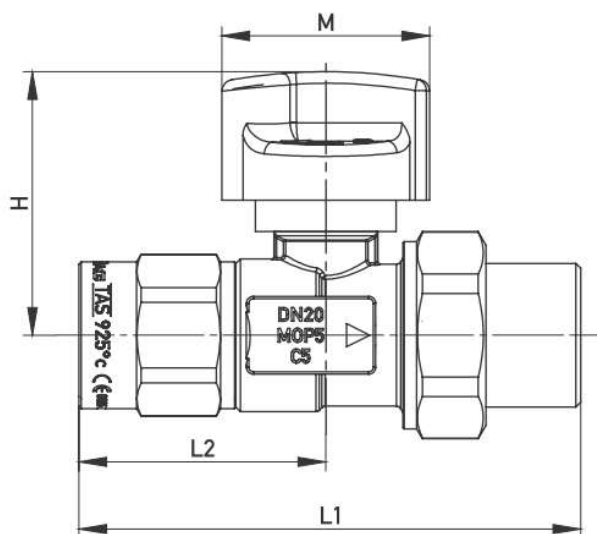

TECHNISCHE DATEN

Druckbereich	MOP 5
Temperaturbereich	-20°C +60°C
Hitzebeständigkeit nach	HTB GT5 650°Cx30'
Auslösetemperatur TAE	100°C -5K
Einsatzbereich	Gase nach EN 437 u. DVGW 260/1 (Methan, Butan, Propan)

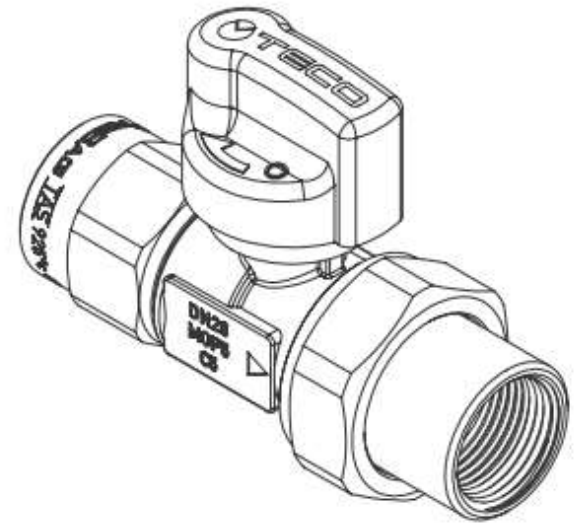

KBN	DN	D1	L1	L2	M	H	SW1	SW2
TSVGDH15T	15	Rp 1/2"	83	35	45	56	27	34
TSVGDH15MT	15	Rp 1/2"	83	35	45	56	27	34
TSVGDH20T	20	Rp 3/4"	96	41	45	58	32	41
TSVGDH20MT	20	Rp 3/4"	96	41	45	58	32	41
TSVGDH25T	25	Rp 1"	136	69	48	63	41	48
TSVGDH25MT	25	Rp 1"	136	69	48	63	41	48